

208~230V Air Handler


Model:GMV-ND48A/A-T(U)



| Specifications | Unit | Parameter |
|--------------------------------------|----------------------|---|
| Model | — | GMV-ND48A/A-T(U) |
| Performance | | |
| Rated Cooling Capacity | kBtu/h | 48 |
| Rated Heating Capacity | kBtu/h | 54 |
| Sound Pressure Level | dB(A) | 47/49/51 |
| Electrical Data | | |
| Power Supply | Voltage,Phase, Hertz | 208/230,1,60 |
| Maximum Overcurrent Protection (MOP) | A | 15 |
| Minimum Circuit Amps (MCA) | A | 4.25 |
| Fan | | |
| Type × Quantity | — | Centrifugal ×1 |
| Air Flow Volume | CFM | 1353/1500/1618 |
| ESP | In.W.G | 0.2/0~0.5 |
| Fan Motor Running Current | A | 3.4 |
| Fan Motor Power Output | W | 428.7 |
| Refrigerant Piping | | |
| Connection Pipe | Gas(mm/inch) | Φ15.9/Φ5/8 |
| | Liquid(mm/inch) | Φ9.52/Φ3/8 |
| Connection method | — | Brazing Connection |
| Refrigerant | — | R410A |
| Dimension/Weight | | |
| Dimensions (H×W×D) | mm/inch | 1224×630×540/ (48-1/4×24-7/8×21-1/4) |
| Net Weight | kg/lbs | 81/179 |
| Other | | |
| Safety Certification | — | ETL |

| | | | |
|-----------------------|--|-------|--|
| Job Name: | | Date: | |
| System Reference No.: | | | |
| Engineer Signature: | | | |

Outline and Physical Dimensions of GMV-ND48A/A-T(U).

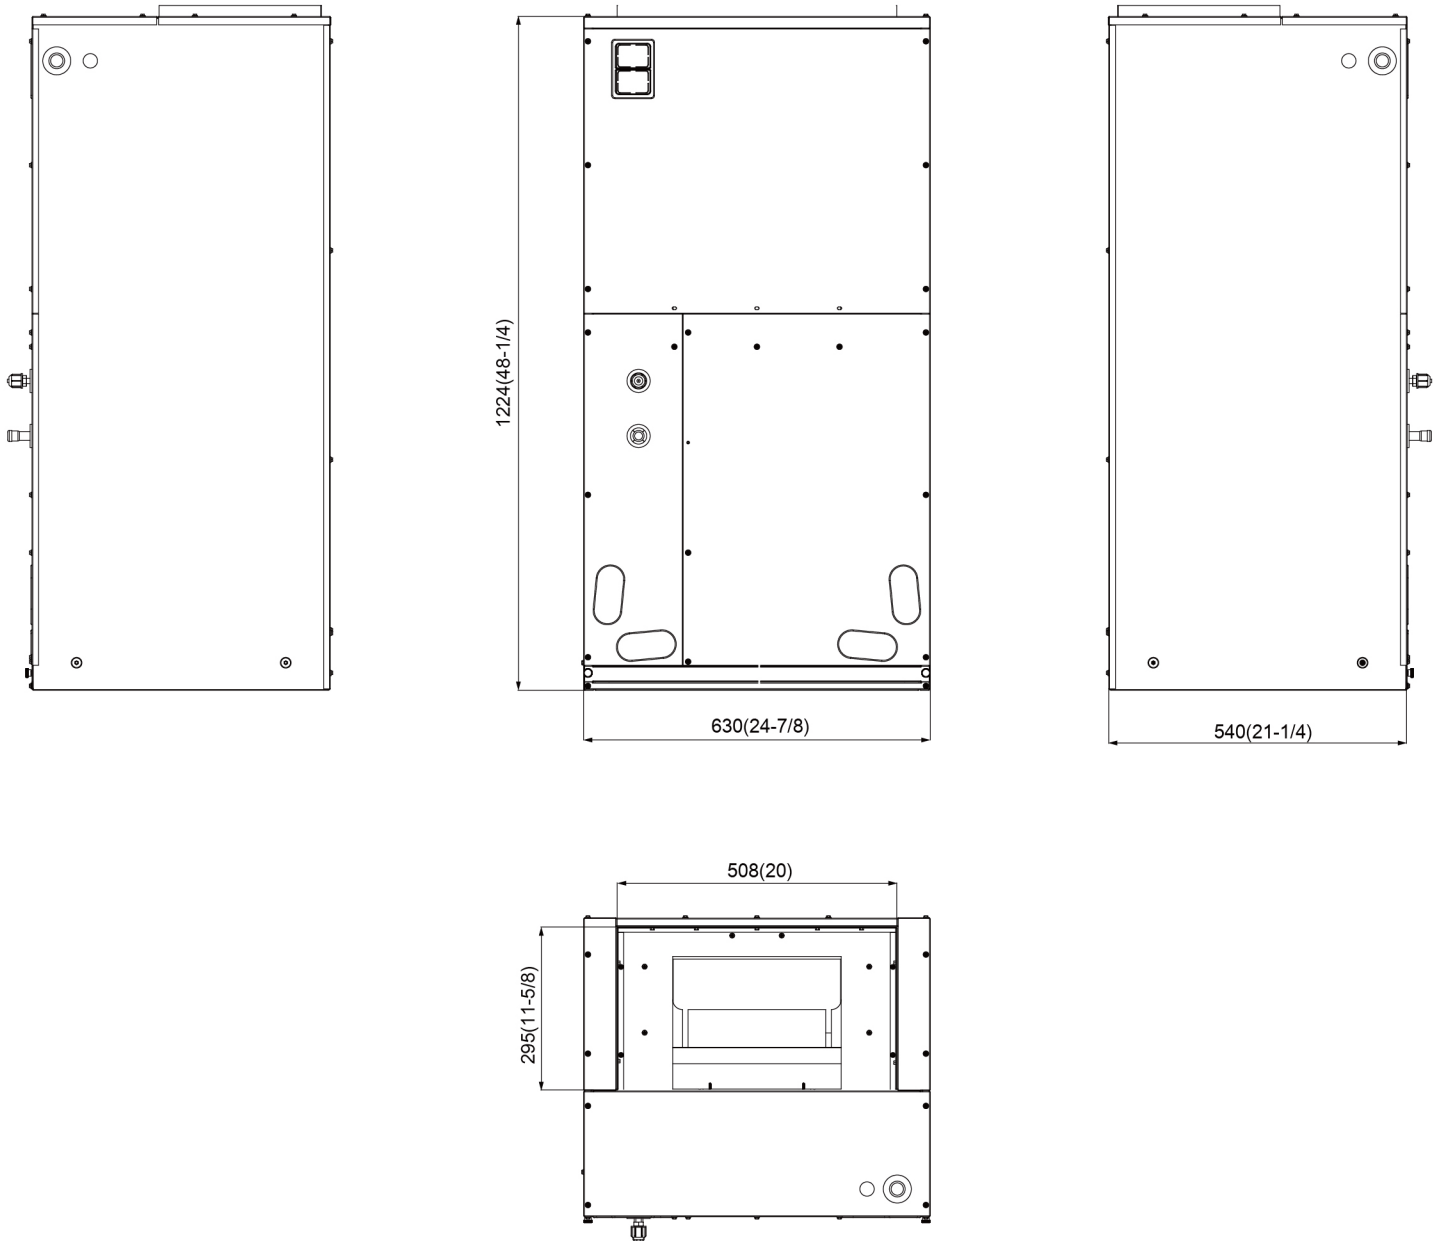

Unit:mm(in.)

