

## 208~230V Super High ESP Fan Coil


### Model:GMV-ND36PHS/B-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND36PHS/B-T(U)
<b>Performance</b>		
Rated Cooling Capacity	kBtu/h	36
Rated Heating Capacity	kBtu/h	40
Sound Pressure Level	dB(A)	40/42/45
<b>Electrical Data</b>		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1.7
<b>Fan</b>		
Type × Quantity	—	Centrifugal ×3
Air Flow Volume	CFM	824/942/1177
ESP	Pa (In.W.G)	90/0~200 (0.36/0~0.8)
Fan Motor Running Current	A	1.2
Fan Motor Power Output	W	350
<b>Refrigerant Piping</b>		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Connection method	—	Brazing Connection
Refrigerant	—	R410A
<b>Dimension/Weight</b>		
Dimensions (H×W×D)	mm/inch	300×1400×700/ (11-13/16×55-1/8×27-9/16)
Net Weight	kg/lbs	55/121
<b>Other</b>		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

### Outline and Physical Dimensions of GMV-ND36PHS/B-T(U).

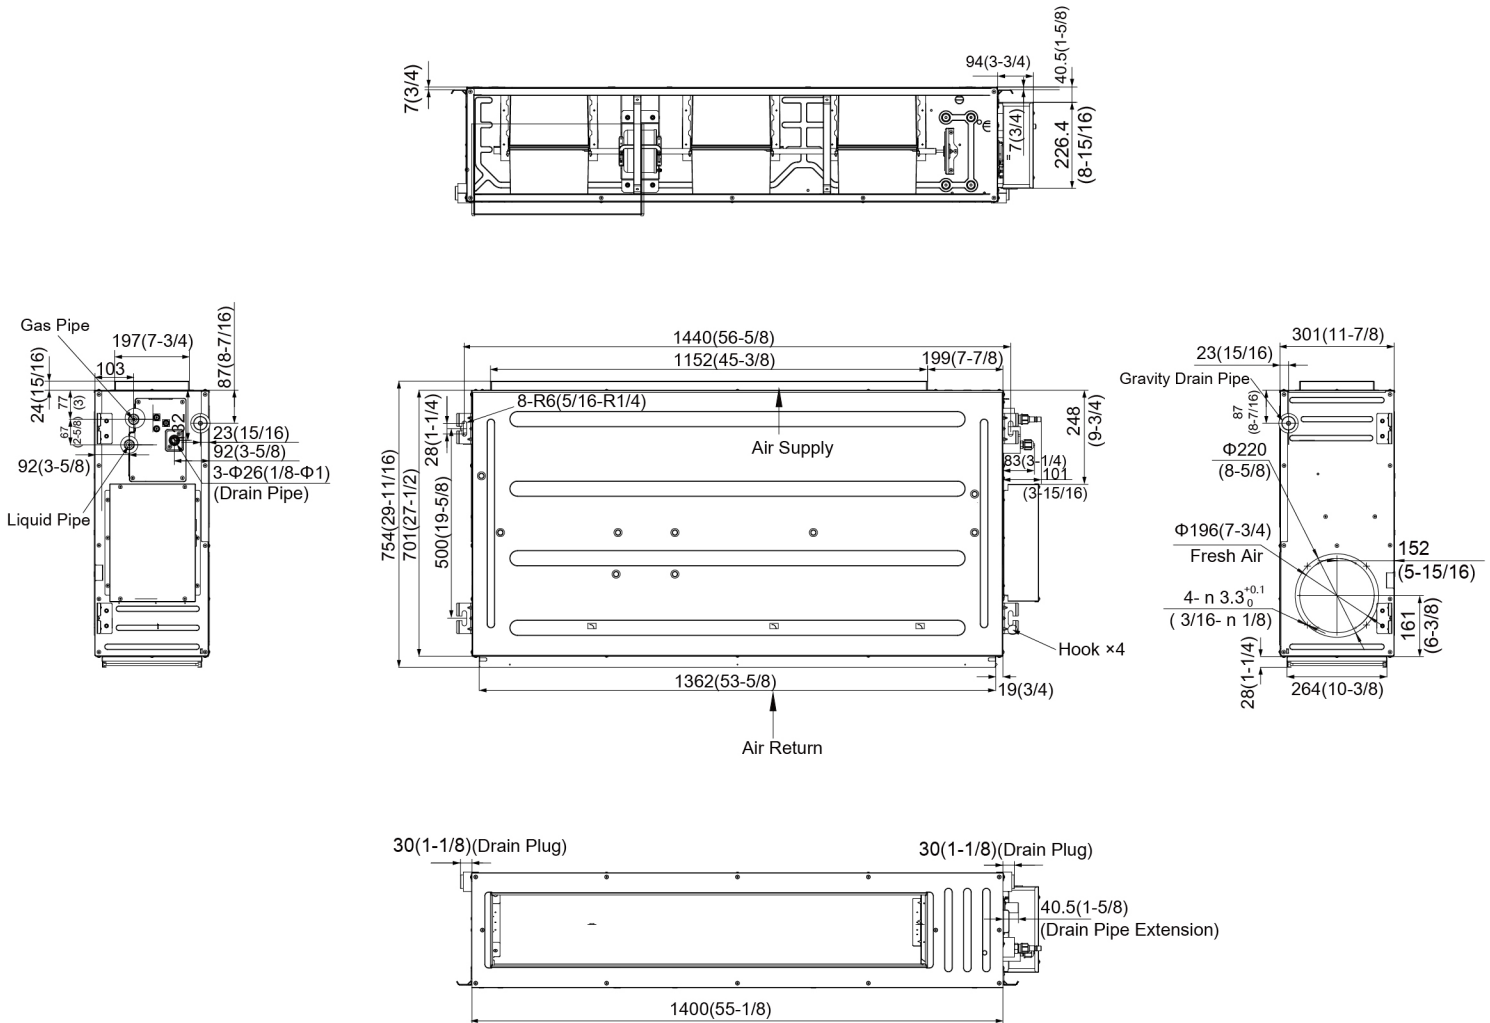

Model	Gas Pipe Diameter	Liquid Pipe Diameter
GMV-ND36PHS/B-T(U)	5/8"	3/8"

Unit:mm(in.)

